

Project:	Date
Type:	
Model:	

Features:

HOUSING MATERIALS	Die-casting dark gray powder coated aluminum. T=20-25 um. Adhesion of ISO class, 1.ASTM class 4B
FRONT COVER	Die-casting aluminum, powder coated finishes
LED	SMD3030
DIMMABLE	No
J-BOX	ABS
WATER-TIGHT CABLE GLAND	IP67
OPERATING TEMPERATURE	-4°F to 113°F
POWER CABLE	H05RN-F 2X1.0mm ² L=0.5m (24 Volts)
FIXTURE IP/ IK Rating	IP65 Rated / IK10

FINISH OPTIONS




Black
RAL9005




Silver Aluminum
RAL9006




Bronze
RAL8019




RSV-R




RSV-S

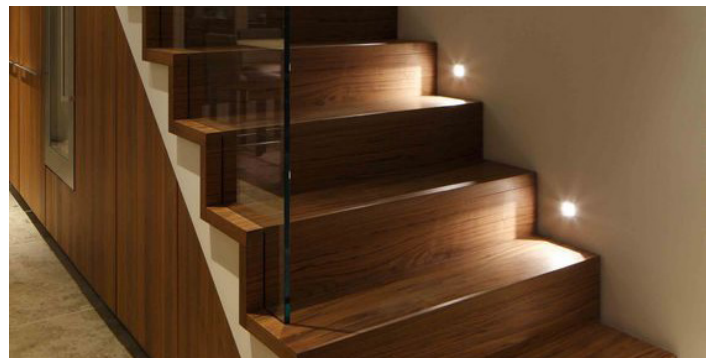

Cut-out



Pressure clips snaps into wall



ABS sleeves allows for install to concrete wall.

Example: RSV-R-OL30K-X-GR



Series	Trim Shape	Lumens (CCT)			Voltage	Finish
RSV 2.4 Watts	R Round	OL20K 0L (2000K) 52 Lumens	OL30K 0L (3000K) 55 Lumens	OL40K 0L (4000K) 60 Lumens	X X = 24 Volts	BK Black
	S Square					SA Silver Aluminum
						BZ Bronze


Enter configuration:

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Series	RSV-R-S
Power	2.4W
Lumens	52 (20K) 55 (30K) 60 (40K)
IP Rating	IP65
Operating Temp.	-4°F to 113°F
Input	24V

DIMENSIONS

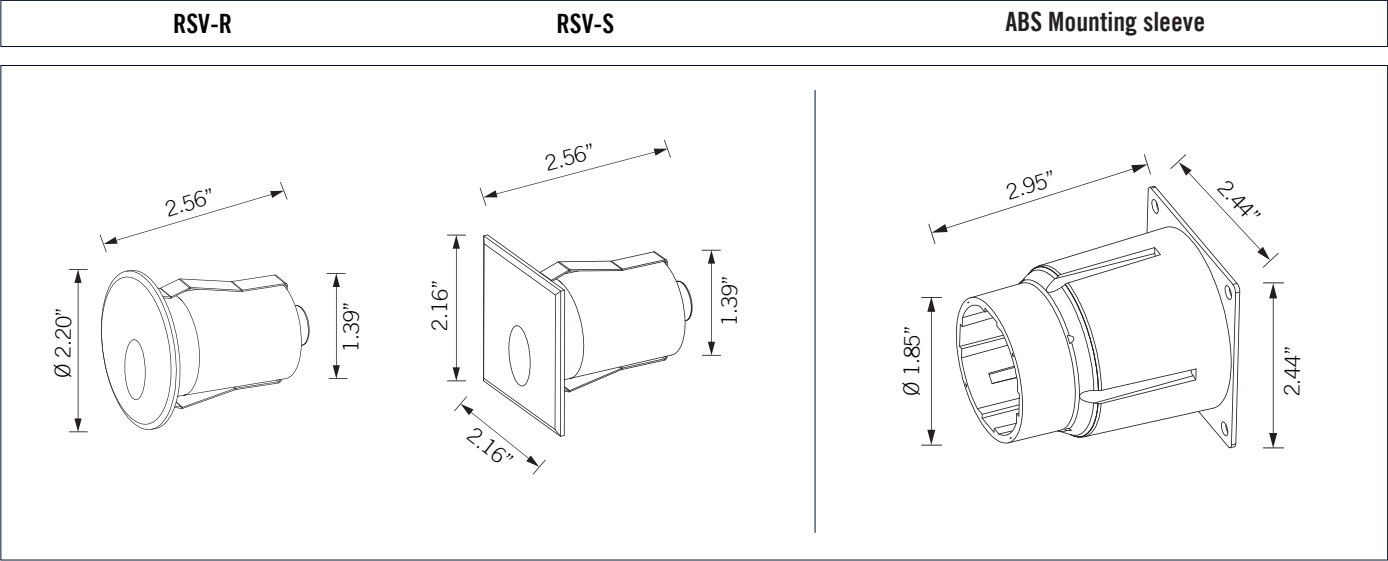

PHOTOMETRIC CURVES

