
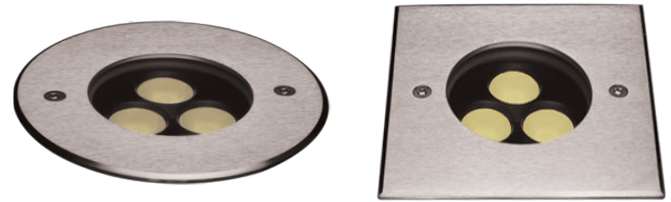


Project:	Date
Type:	
Model:	

Features:

HOUSING MATERIALS	Die-casting dark gray powder coated aluminum T=60~80 um./Adhesion of ISO class, 1.ATM class 4B
FRONT COVER	Chromeplated stainless steel SUS 316 [#]
GLASS LENS	Tempered step glass. T=8mm
DIMMABLE	No
CONCRETE POUR KIT / SLEEVE	ABS
WATER-TIGHT CABLE GLAND	IP68
REFLECTOR	Optical reflector 9°/ 15°/ 20°/ 30° / 45°
LED	OSRAM
OPERATING TEMPERATURE	-4°F to 104°F
POWER CABLE	H05RN-F 2X1.0mm ² L=0.5m (low voltage)
FIXTURE IP/ IK Rating	IP66 Rated / IK08

OPTICS

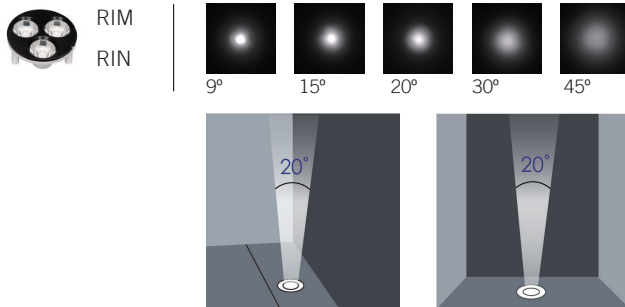


RIM

RIN

OPTIONAL LOUVER



GLASS PRESSURE CAPACITY



Example: RIM-3L20K-D45-X-SS



Series	Lumens (CCT)			Beam Angle					Accessory	Voltage	Finish
RIM Round Inground 5.2 Watts	3L20K 3L (2000K) 376 Lumens	4L30K 4L (3000K) 479 Lumens	5L50K 5L (5000K) 500 Lumens	D9 9°	D15 15°	D20 20°	D30 30°	D45 45°	Leave Blank Blank = None	X 24 Volts	SS Stainless Steel 316L
RIN Square Inground 5.2 Watts	Lumens based off 20° Beam angle								LH012 Hexcell Louver Accessory	Requires remote 24V transformer. This fixture is not dimmable*	




Enter configuration:

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Series	RIM / RIN
Power	5.2W
Lumens	376 (20K) 479 (30K) 500 (50K)
IP Rating	IP66
Operating Temp.	-4°F to 104°F
Input	24V

DIMENSIONS

RIM	RIN	CONCRETE POUR KIT / SLEEVE
		

PHOTOMETRIC CURVES

