

Project:	Date
Type:	
Model:	

Features:

HOUSING MATERIALS	Die-casting dark grey powder coated aluminum. T=60-80 um. Adhesion of ISO class, 1.ASTM class 4B
FRONT COVER	Die-cast aluminum, powder coated.
LED	SMD3030
DIMMABLE	No
J-BOX	ABS
WATER-TIGHT CABLE GLAND	IP67
OPERATING TEMPERATURE	-4°F to 113°F
POWER CABLE	H05RN-F 2X1.0mm ² L=0.5m (24 Volts)
FIXTURE IP/ IK Rating	IP65 Rated / IK10

FINISH OPTIONS



Black
RAL9005



Light Gray
RAL7038



Graphite
RAL7037



RSG



Example: RSG-OL30K-X-BK



Series	Lumens (CCT)			Voltage	Finish
RSG 3.3 Watts	OL20K OL (2000K) 53 Lumens	OL30K OL (3000K) 55 Lumens	OL40K OL (4000K) 64 Lumens	X X = 24 Volts Requires remote 24V transformer. This fixture is not dimmable*	BK Black
					LG Light Gray GR Graphite


Enter configuration:

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Series	RSG
Power	3.3W (1x 3W)
Lumens	53 (20K) 55 (30K) 64 (50K)
IP Rating	IP65
Operating Temp.	-4°F to 104°F
Input	24V

DIMENSIONS

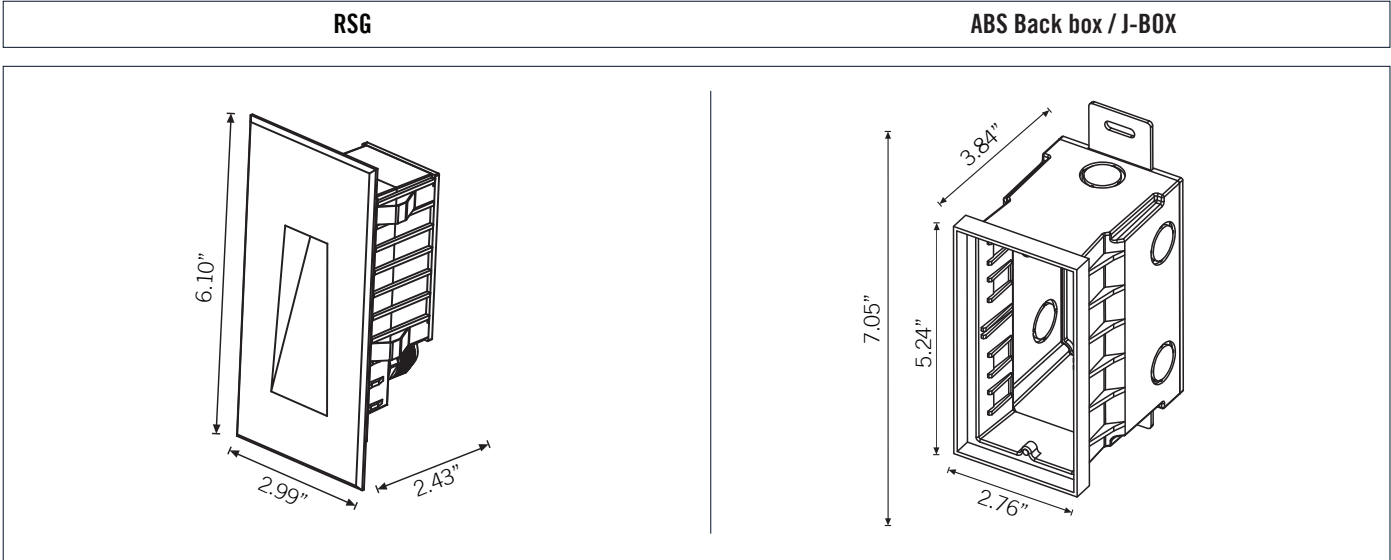

PHOTOMETRIC CURVES

