


Project:	Date
Type:	
Model:	

Features:

HOUSING MATERIALS	Extruded aluminum alloy #6063 Powder coating, T=60~80 um.
FINISH	Black / Graphite / Silver
REFLECTOR	Optical reflector efficiency >85%
LED	NICHIA
DIMMABLE	No
OPERATING TEMPERATURE	-4°F to 104°F
POWER CABLE	H05RN-F 3X1.0mm ² L=0.3m (High voltage)
FIXTURE IP/ IK Rating	IP67 Rated / IK10

OPTICS

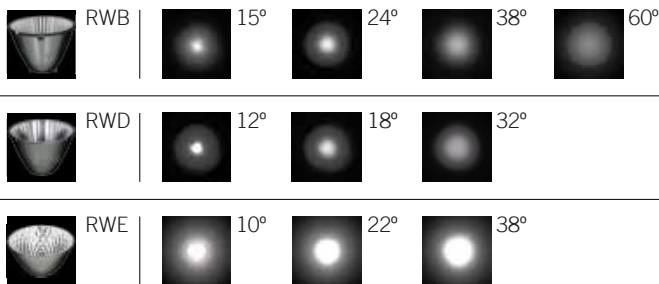

FINISH OPTIONS



Example: RWB-11L30K-D24-Z-BK



Series	Lumens (CCT)			Beam Angle				Voltage	Finish
RWB Wall light 10 Watts	11L30K 11L (3000K) 1,170 Lumens	13L40K 13L (4000K) 1,300 Lumens	13L50K 13L (5000K) 1,335 Lumens	D15 15°	D24 24°	D38 38°	D60 60°	Z Z = 120 Volts	BK Black
RWD Wall light 18 Watts	14L30K 14L (3000K) 1,432 Lumens	15L40K 15L (4000K) 1,590 Lumens	16L50K 16L (5000K) 1,684 Lumens	D12 12°	D18 18°	D32 32°			SV Silver
RWE Wall light 25 Watts	24L30K 24L (3000K) 2,412 Lumens	25L40K 25L (4000K) 2,590 Lumens	26L50K 26L (5000K) 2,615 Lumens	D10 10°	D22 22°	D38 38°			GR Graphite

Enter configuration:

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Table with 4 columns: Series, RWB-10W, RWD-18W, RWE-25W. Rows include Power (10W, 18W, 25W), Lumens (1,170 to 2,615), IK Testing (IK10), Operating Temp. (-4°F to 104°F), and Input (120V).

DIMENSIONS

