

Project:	Date
Type:	
Model:	

Features:

HOUSING MATERIALS	Die-casting dark grey powder coated aluminum. T=60-80 um. Adhesion of ISO class, 1.ASTM class 4B
FRONT COVER	Die-cast aluminum, powder coated.
LENS	Polycarbonate T=3mm
LED	SMD3030
DIMMABLE	No
J-BOX	ABS
WATER-TIGHT CABLE GLAND	IP67
OPERATING TEMPERATURE	-4°F to 113°F
POWER CABLE	H05RN-F 2X1.0mm ² L=0.5m (24 Volts)
FIXTURE IP/ IK Rating	IP65 Rated / IK09

FINISH OPTIONS



Black
RAL9005




Silver
RAL9022



Graphite
RAL7037



RSL

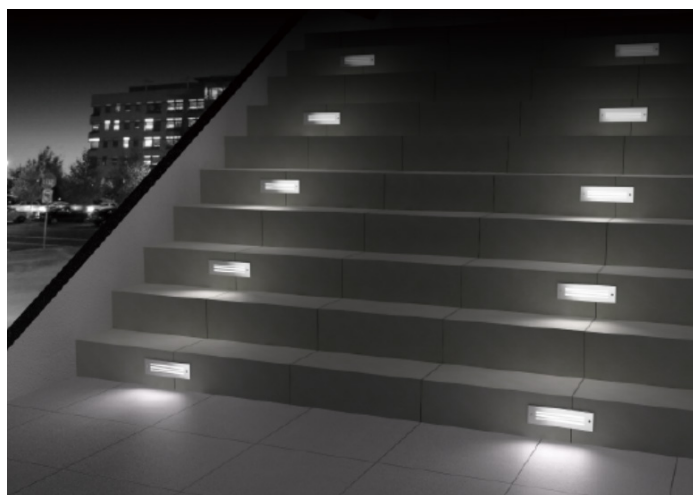

Example: RSL-0L30K-X-BK



Series	Lumens (CCT)			Voltage	Finish
RSL 5.3 Watts	0L20K 0L (2000K) 44 Lumens	0L30K 0L (3000K) 48 Lumens	0L40K 0L (4000K) 50 Lumens	X X = 24 Volts Requires remote 24V transformer. This fixture is not dimmable*	BK Black
					SV Silver GR Graphite


Enter configuration:

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Series	RSL
Power	5.3W
Lumens	44 (20K) 48(30K) 50 (40K)
IP Rating	IP65
Operating Temp.	-4°F to 113°F
Input	24V

DIMENSIONS

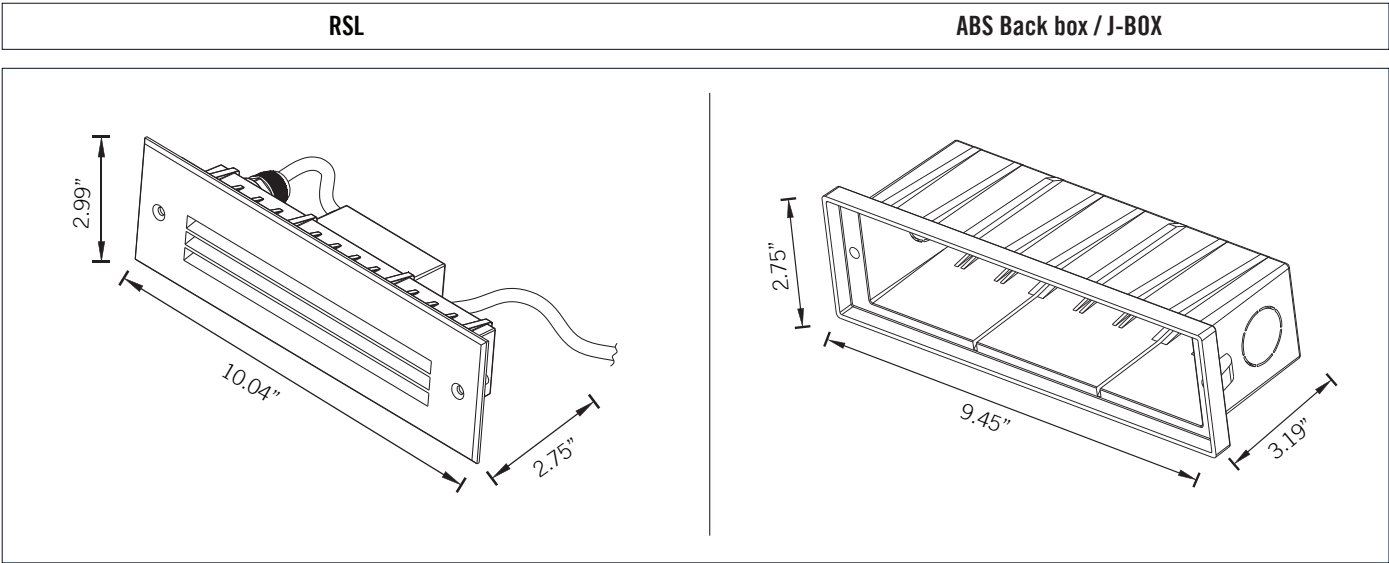

PHOTOMETRIC CURVES

