

Project:	Date
Type:	
Model:	


Features:

HOUSING MATERIALS	Die-casting dark grey powder coated aluminum. T=20-25 um. Adhesion of ISO class, 1.ASTM class 4B
FRONT COVER	Hard chrome-plated stainless steel SUS 316#
LED	SMD3030
DIMMABLE	No
J-BOX	ABS
WATER-TIGHT CABLE GLAND	IP67
OPERATING TEMPERATURE	-4°F to 113°F
POWER CABLE	H05RN-F 2X1.0mm ² L=0.5m (24 Volts)
FIXTURE IP/ IK Rating	IP65 Rated / IK10


MOUNTING OPTIONS




Cut-out




Pressure clips snaps into wall



ABS sleeves allows for install to concrete wall.



RSU-R



RSU-S



Example: RSU-S-OL30K-X-SS



Series	Trim Shape	Lumens (CCT)			Voltage	Finish
RSU 2.4 Watts	R Round	OL20K OL (2000K) 52 Lumens	OL30K OL (3000K) 55 Lumens	OL40K OL (4000K) 60 Lumens	X X = 24 Volts Requires remote 24V transformer. This fixture is not dimmable*	SS Stainless Steel
	S Square					


Enter configuration:

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Series	RSU-R-S
Power	2.4W
Lumens	52 (20K) 55 (30K) 60 (40K)
IP Rating	IP65
Operating Temp.	-4°F to 113°F
Input	24V

DIMENSIONS

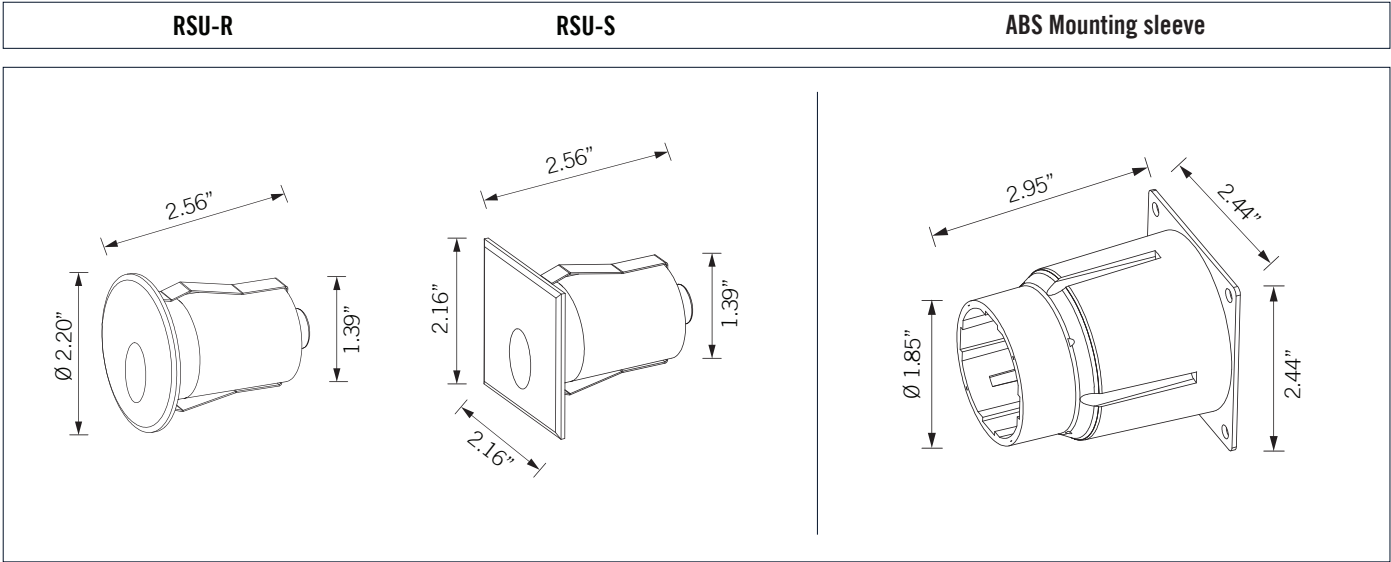

PHOTOMETRIC CURVES

