

Project:	Date
Type:	
Model:	

ELECTRICAL

- Dual 120/277 voltage standard.
- Output: 4.8 Watt LED
- Push-to-test switch for mandated code compliance testing.
- 3.6V long life maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING


- EZ-snap mounting canopy included for back mount.

HOUSING

- Injection-molded, engineering grade 5VA, flame retardant, high-impact resistant thermoplastic ABS housing.

WARRANTY / LISTING

- Five year warranty on all electronics and housing.
- Battery is prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (-4°C – 104°F).
- Certified to CEC under Title 20 Regulations.

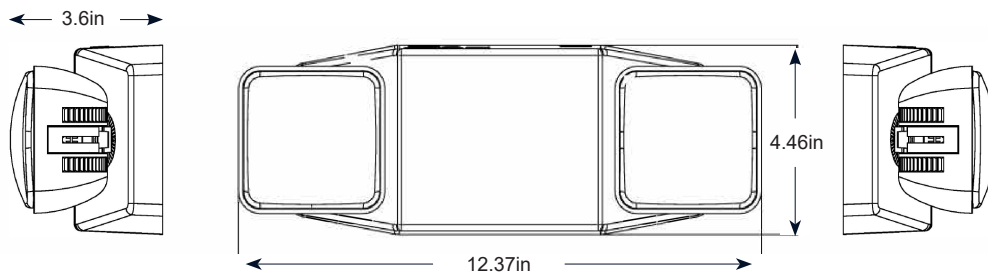

Example: LE-WPL-2S-W-N-HO-SD



Series	LED Light	Finish	Battery	LED	Self-Diagnostic
LE-WPL Emergency 2 Light Bug Eyes Square	2S 2LT Square	W White	N Nickel-cadmium batteries 3.6V	HO High Output 4.8 watt LED	SD Self-Diagnostic Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.

Enter configuration:

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.