

Project:

Type:


Model:

Features:

HOUSING MATERIALS	Die-casting dark grey powder coated aluminum. T=60-80 um. Adhesion of ISO class, 1.ASTM class 4B
FRONT COVER	Die-cast aluminum, powder coated.
LENS	Polycarbonate T=3mm
LED	SMD3030
DIMMABLE	Yes*
J-BOX	ABS
WATER-TIGHT CABLE GLAND	IP67
OPERATING TEMPERATURE	-4°F to 113°F
POWER CABLE	H05RN-F 2X1.0mm ² L=0.5m (24 Volts)
FIXTURE IP/ IK Rating	IP65 Rated / IK09

FINISH OPTIONS


RSL

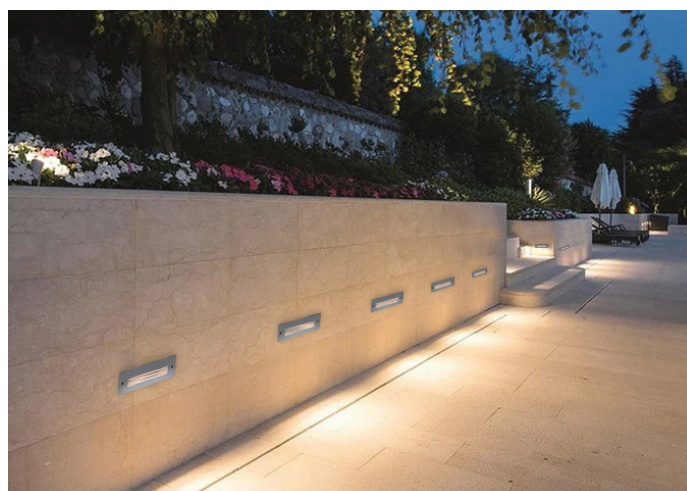

Example: RSL-OL30K-X-BK



Series	Lumens (CCT)			Voltage	Finish
RSL 5.3 Watts	OL20K 0L (2000K) 39 Lumens	OL30K 0L (3000K) 44 Lumens	OL40K 0L (4000K) 50 Lumens	X X = 24 Volts Requires remote 24V transformer. For dimming, refer to specs of transformer you are using.*	BK Black WH White GR Graphite SV Silver BZ Bronze

Enter configuration:


** Special Order

Dimensions and values shown are nominal. LuminosoLED continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

PERFORMANCE DATA

Series	RSL
Power	5.3W
Lumens	39 (20K) 44 (30K) 50 (40K)
IP Rating	IP65
Operating Temp.	-4°F to 104°F
Input	24V

DIMENSIONS

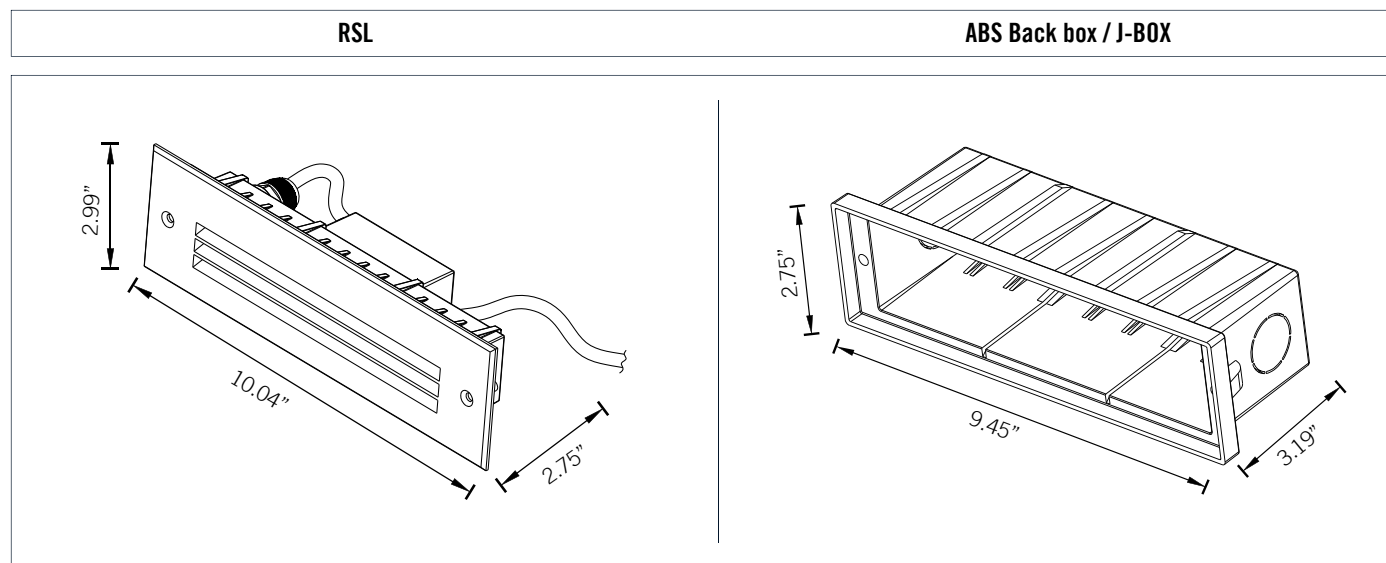

PHOTOMETRIC CURVES

